


# SR-65 EVO Hydraulic Rotary Rig

## TRANSPORT, DIMENSIONS AND WEIGHTS

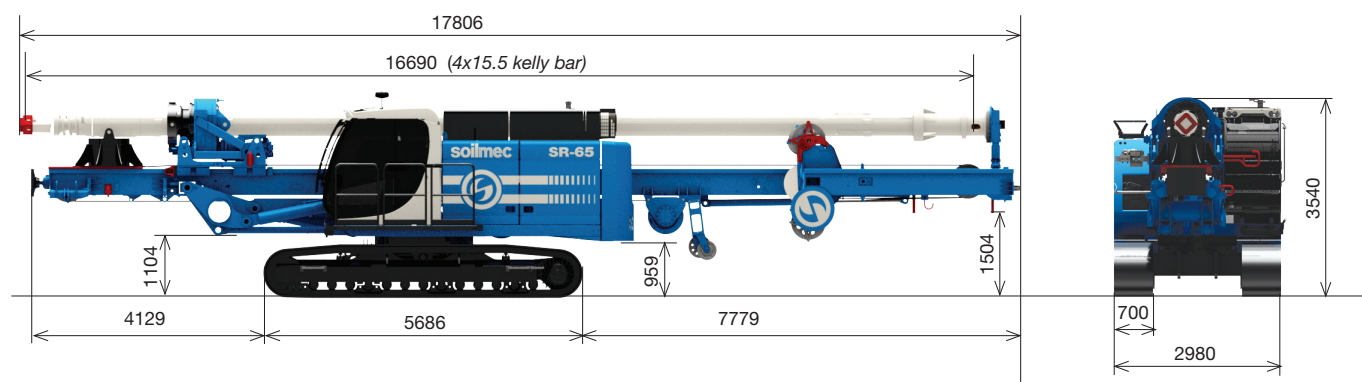

All technical data are purely indicative and subject to change without notice

Transport configuration		
Transport width	2980 mm	117.32 in
Transport length	17600 mm	692.91 in
Transport height	3540 mm	139.37 in
Transport weight c/w kelly bar 4x13,5 (CCS - WCS)	63600 / 65800 kg	140213 / 145063 lb
Min transport weight (CCS - WCS) *	48450 / 49850 kg	106813 / 109899 lb
CFA transport weight (Quick conversion - 4°line pull)	57600 / 58300 kg	126985 / 128528 lb

\* CCS: w/o kelly bar and counterweight

WCS: w/o kelly bar, counterweight, cardan joint, rotary flange, foot pad

Technical data sheet SR65- 001- 3/2018

This brochure has been edited and distributed by SOILMEC Spa. The present document cancels and override any previous ones. This brochure shall not be distributed, reproduced or exhibited without SOILMEC Spa. authorization in accordance with to SOILMEC web site disclaimer condition.

SOILMEC Spa distributes machinery and structures all over the world, supported by SOILMEC Spa subsidiary companies and dealers. The complete Soilmec network list is available on the web site [www.soilmec.it](http://www.soilmec.it)

[www.soilmec.it](http://www.soilmec.it)

**soilmec**  
Drilling and Foundation Equipment